PRO7 Quick Start

Dear users:

When you get this powerful product, please do the operations as following.

Product

PRO7 Tablet

Step 1

Connect the VCI to your car OBD interface.

You can find the light will flash (it shows the Connection is good), then it comes into standby and waiting for working. Usually the OBD interface is under the steering wheel (above the brake), some are hidden in the tool box of the hand brake, you can reference the

following picture to find it.

Step 2

On the tablet, click **Settings** – **Bluetooth** and turn on the Bluetooth.

Step 3

Scan the Bluetooth, choose your S/N ID and put the password **0000** or **1234**. Then, click **OK**.

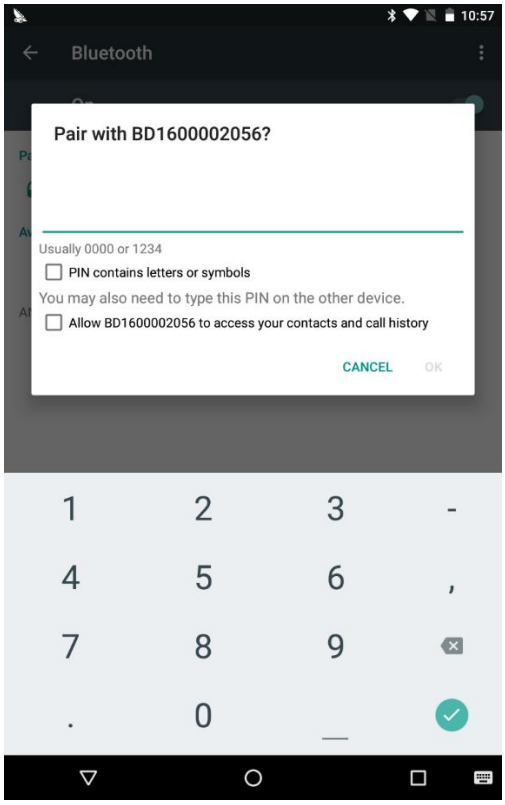

Two Bluetooth information might be displayed. You need to try to connect both Bluetooth until your pair with it successfully.

Step 4

Find the app in PRO Tablet, and register your product.

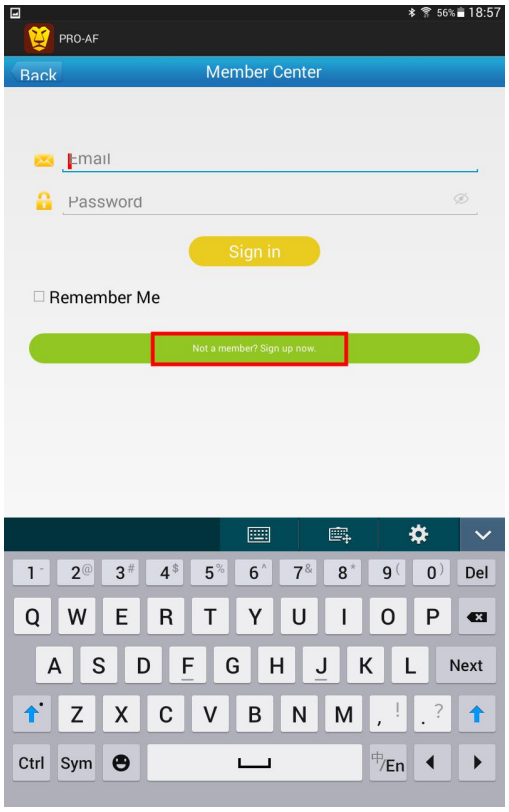
PRO-AF
Back
Member Center
Email
Password
Sign in
Remember Me
Not a member? Sign up now.

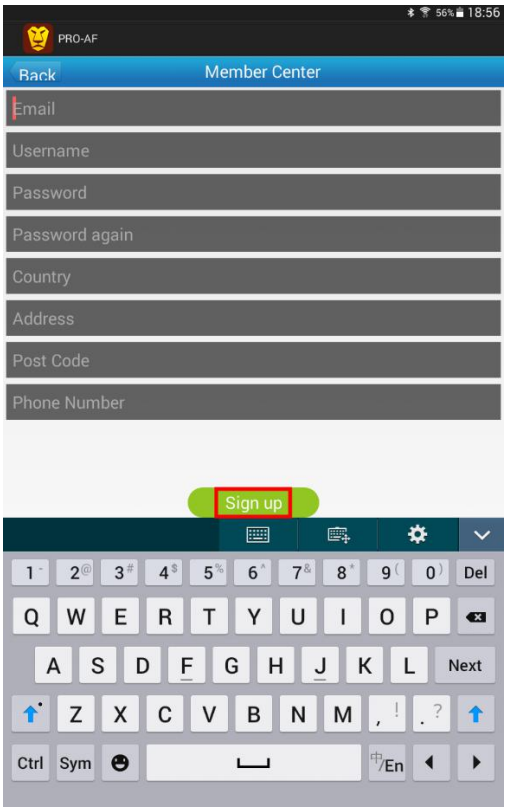
PRO-AF
Back
Member Center
Email
Username
Password
Password again
Country
Address
Post Code
Phone Number
Sign up

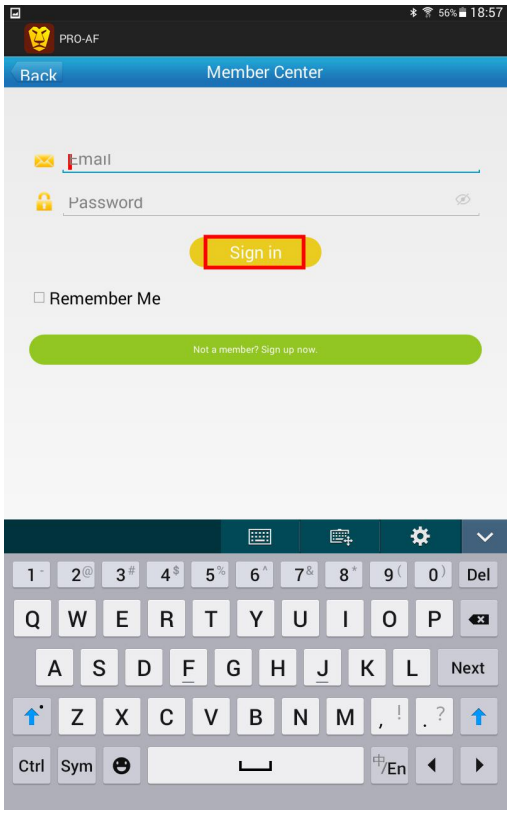
PRO-AF
Back
Member Center
Email
Password
Sign in
Remember Me
Not a member? Sign up now.

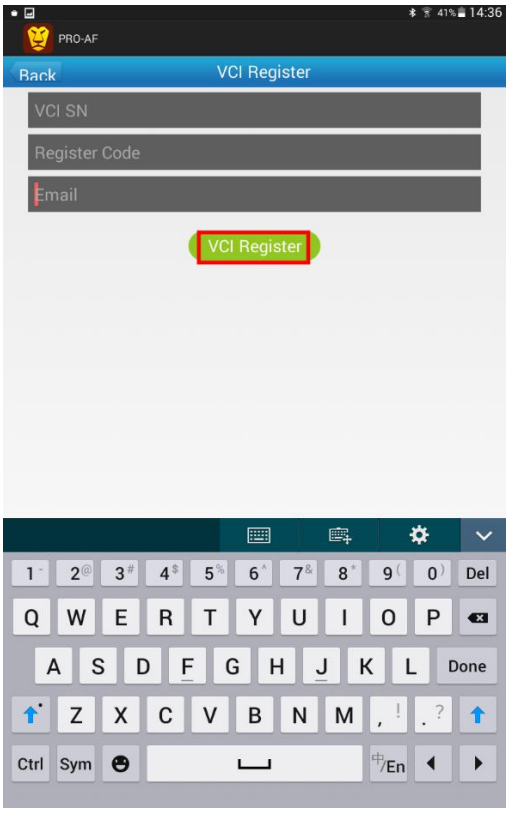
PRO-AF
Back
VCI Register
VCI SN
Register Code
Email
VCI Register

Step 5

Then you can choose the special function or the brand of your car to perform functions.

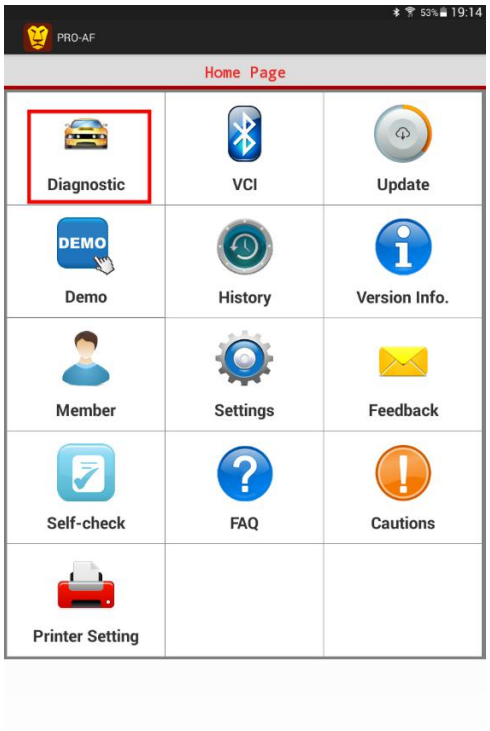

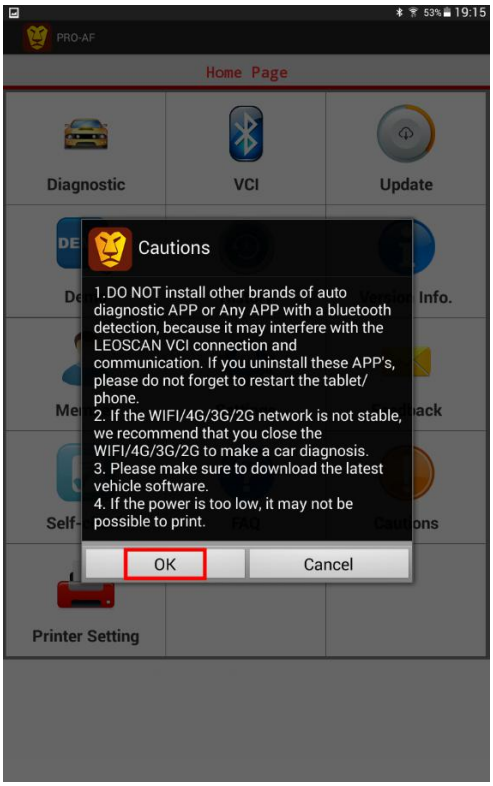

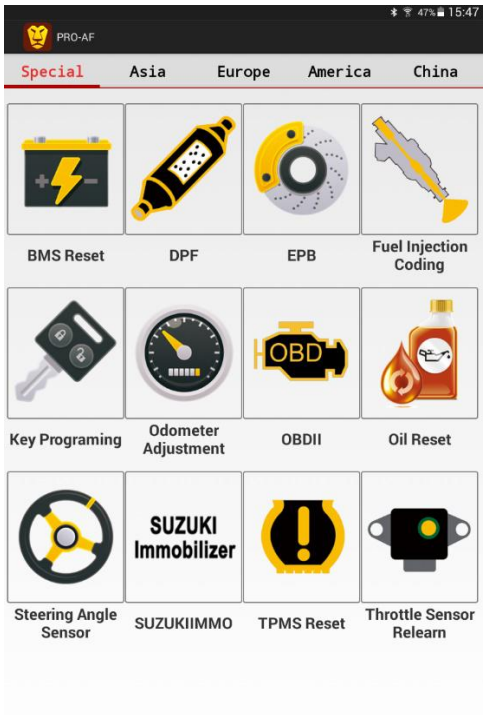
PRO-AF
Special
Asia
Europe
America
China
BMS Reset
DPF
EPB
Fuel Injection Coding
Key Programing
Odometer Adjustment
OBDII
Oil Reset
Steering Angle Sensor
SUZUKI Immobilizer
SUZUKIIMMO
TPMS Reset
Throttle Sensor Relearn

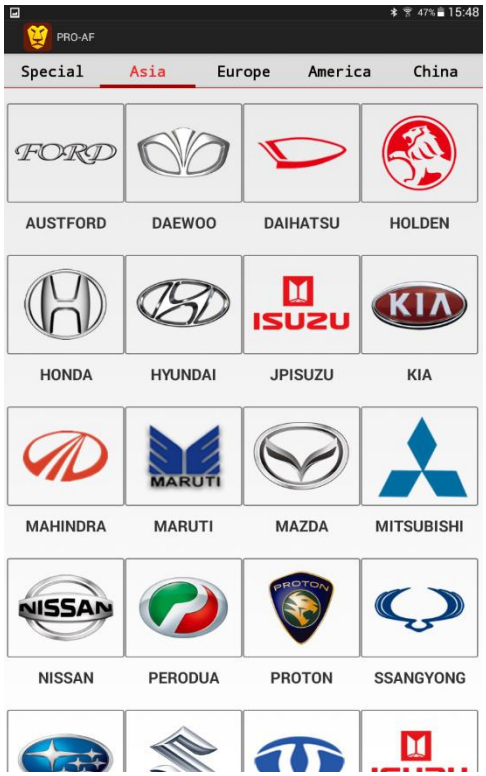
PRO-AF
Special
Asia
Europe
America
China
AUSTFORD
DAEWOO
DAIHATSU
HOLDEN
HONDA
HYUNDAI
JPISUZU
KIA
MAHINDRA
MARUTI
MAZDA
MITSUBISHI
NISSAN
PERODUA
PROTON
SSANGYONG

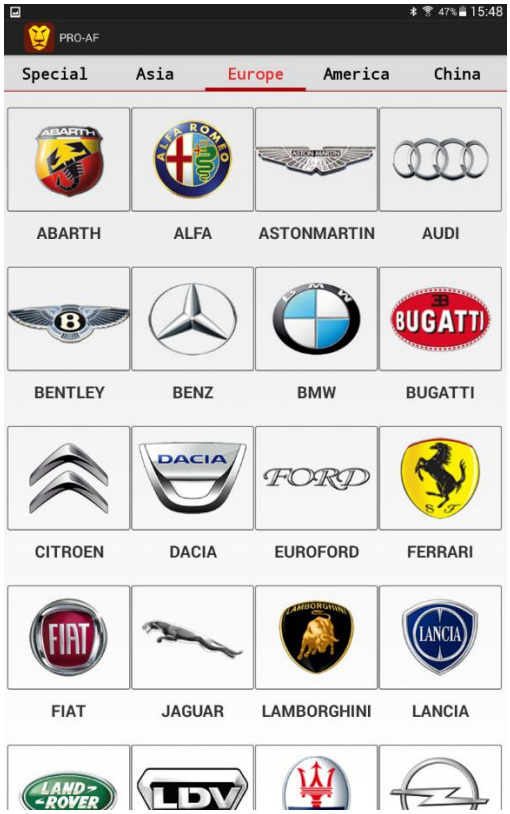
PRO-AF
Special
Asia
Europe
America
China
ABARTH
ALFA
ASTONMARTIN
AUDI
BENTLEY
BENZ
BMW
BUGATTI
CITROEN
DACIA
EUROFORD
FERRARI
FIAT
JAGUAR
LAMBORGHINI
LANCIA

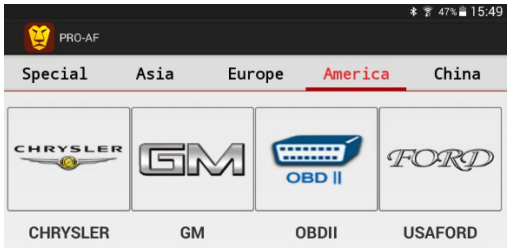
PRO-AF
Special
Asia
Europe
America
China
CHRYSLER
GM
OBDII
USAFORD

Step 6

Find the brand of your car in Diagnostic function as following, and enjoy the service that our products bring to you.

The following shows an example of FIAT:

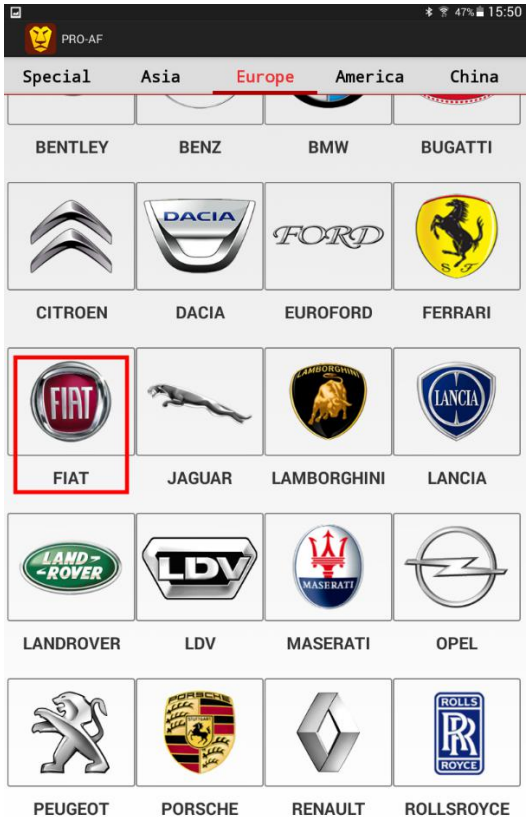

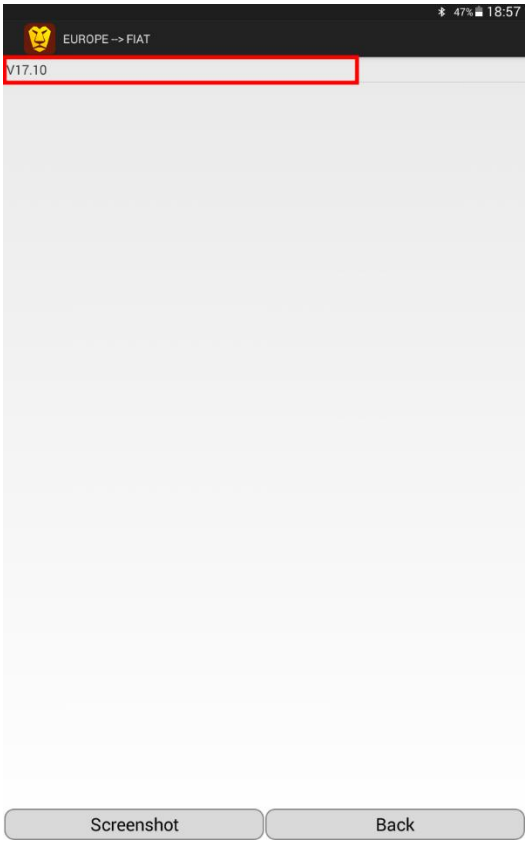

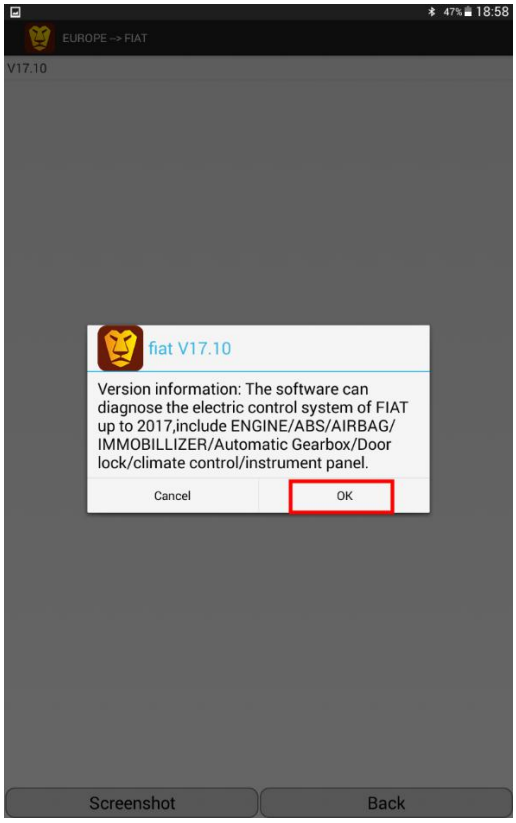

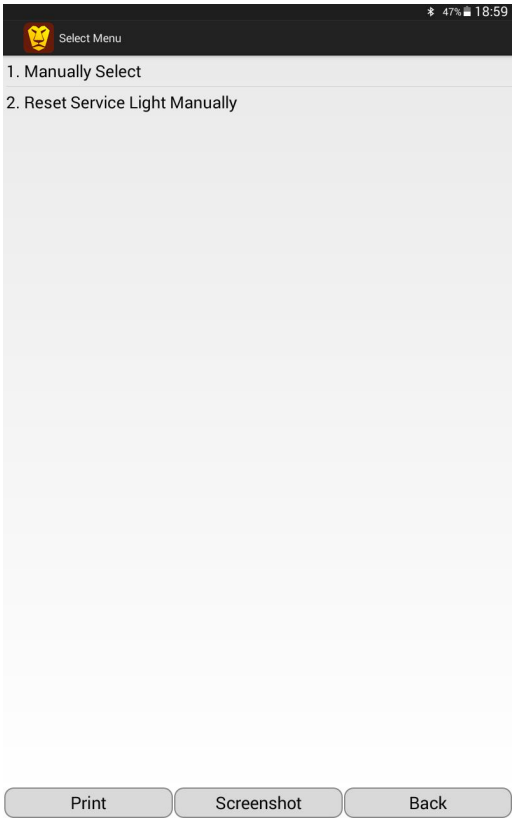

How to download diagnostic software?

Before you perform functions, corresponding diagnostic software must be downloaded.

There are two ways to download the diagnostic software:

1. Click **Diagnostic**, select a car brand and download corresponding version directly.

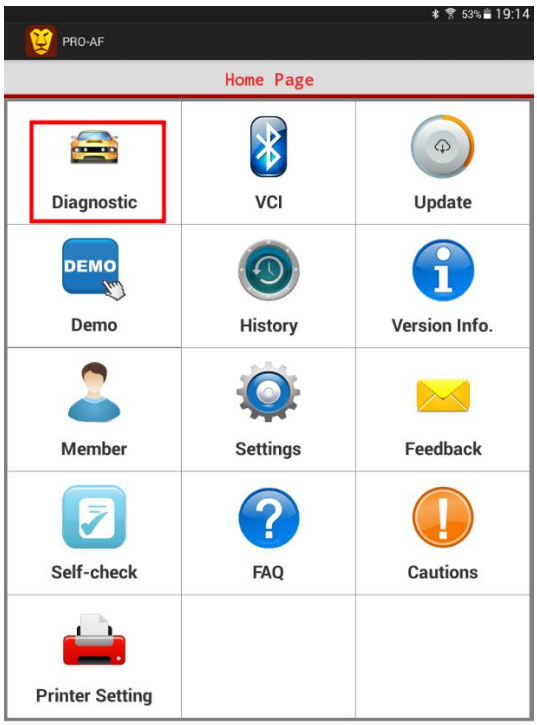
PRO-AF
Home Page
Diagnostic
VCI
Update
Demo
History
Version Info.
Member
Settings
Feedback
Self-check
FAQ
Cautions
Printer Setting

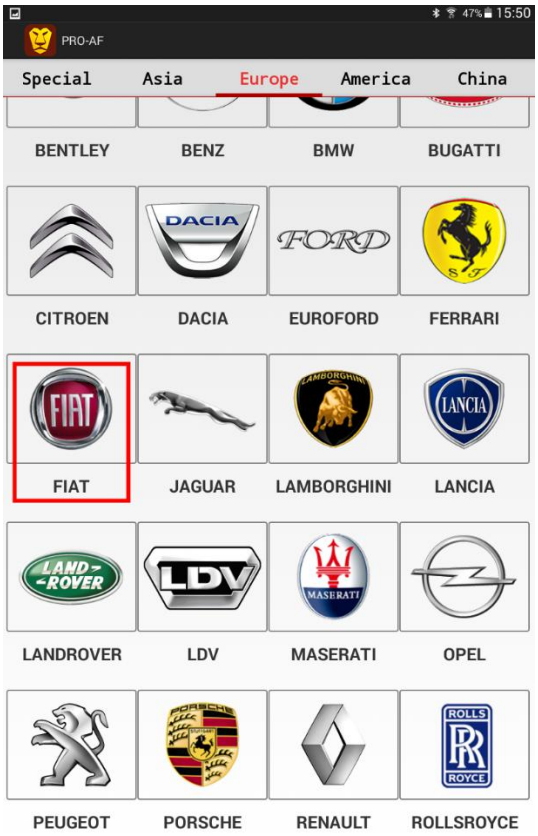
PRO-AF
Special
Asia
Europe
America
China
BENTLEY
BENZ
BMW
BUGATTI
CITROEN
DACIA
EUROFORD
FERRARI
FIAT
JAGUAR
LAMBORGHINI
LANCIA
LANDROVER
LDV
MASERATI
OPEL
PEUGEOT
PORSCHE
RENAULT
ROLLSROYCE

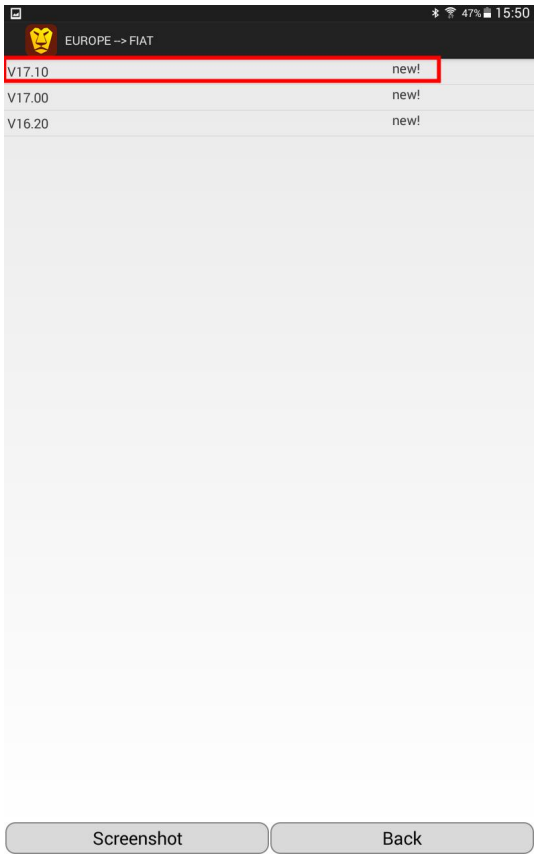
EUROPE --> FIAT
V17.10 new!
V17.00 new!
V16.20 new!
Screenshot
Back

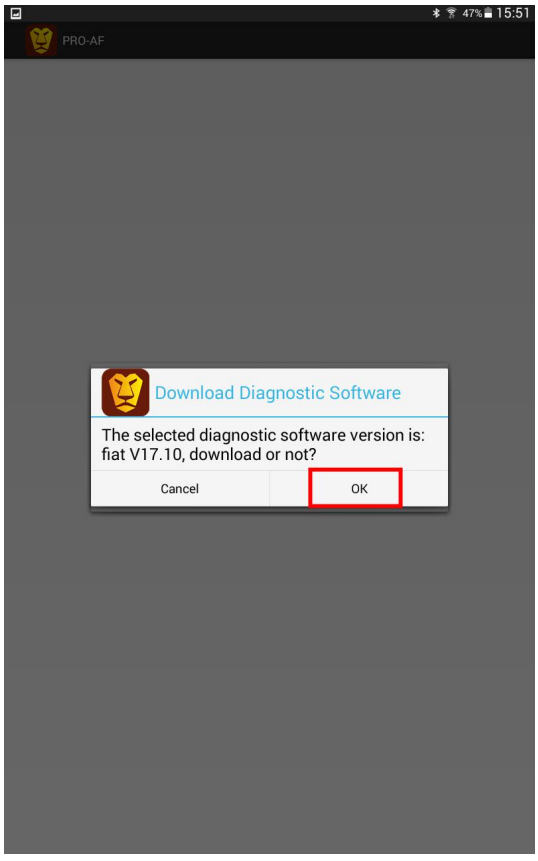
PRO-AF
Download Diagnostic Software
The selected diagnostic software version is:
fiat V17.10, download or not?
Cancel
OK

2. Click the **Update** menu on the **Home Page** to download software.

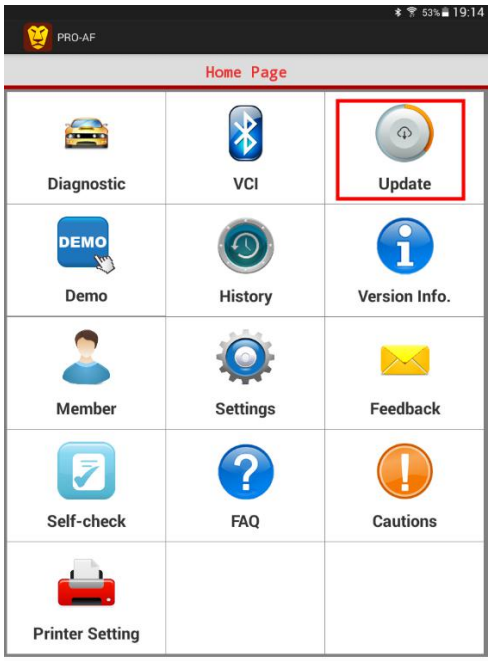

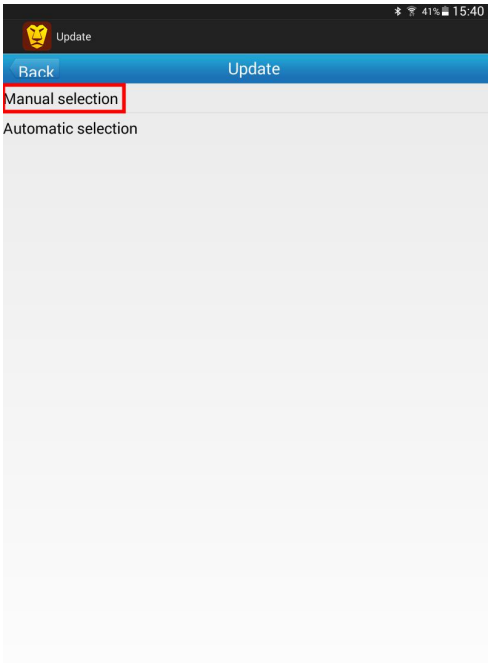

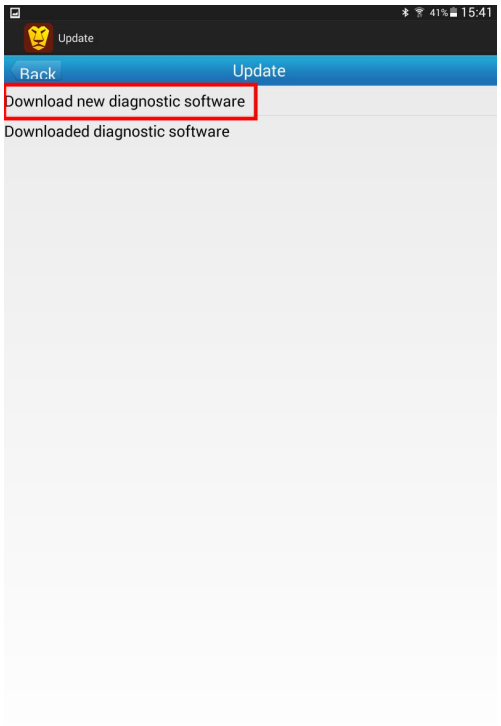

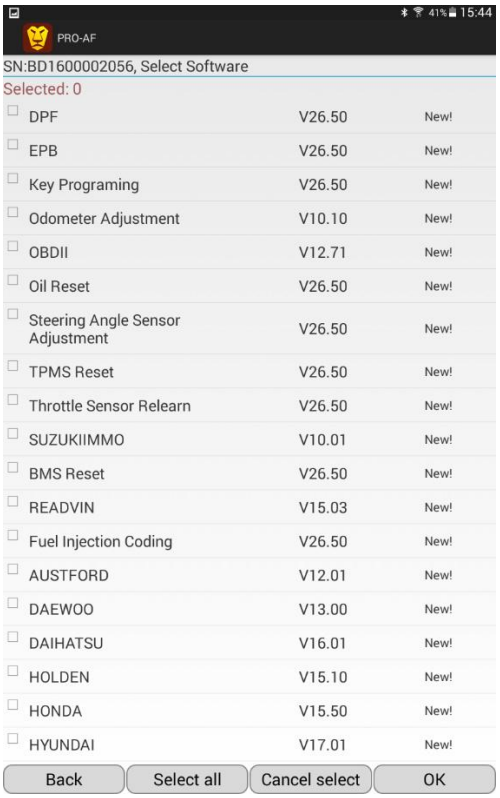

How to connect WiFi printer?

If you want to print the diagnosis of the car, you can connect the wifi printer before diagnosing.

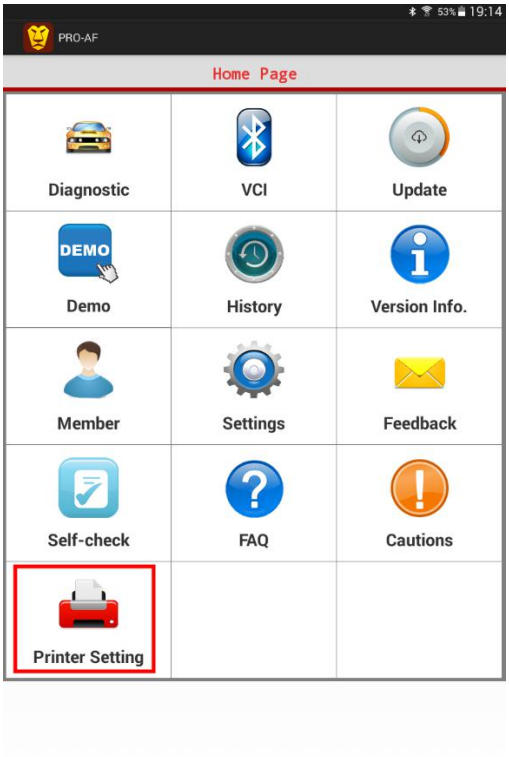

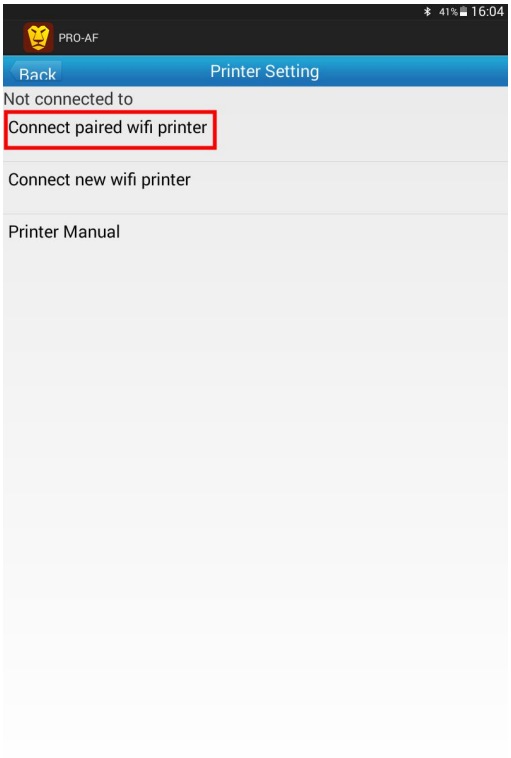

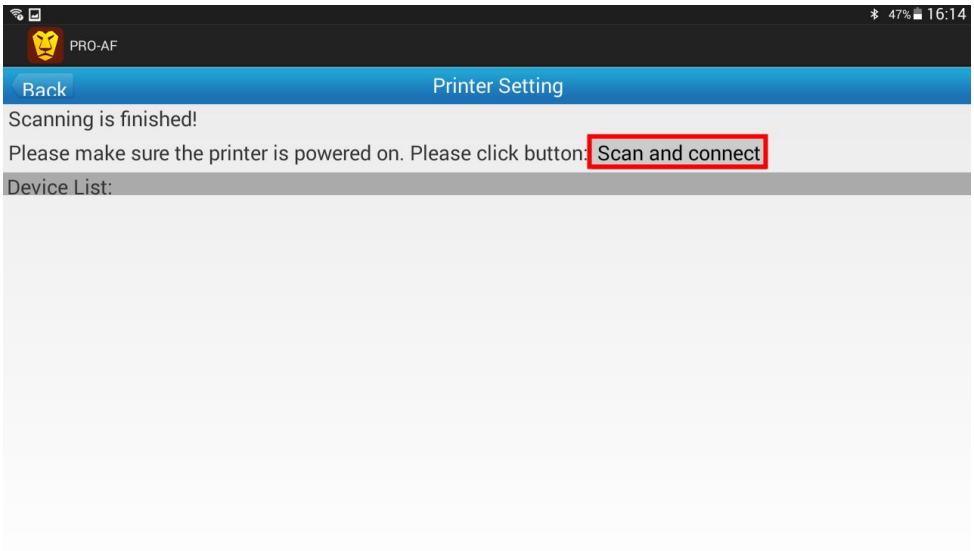

How to upload history records?

You can upload the history records after diagnosing your car.

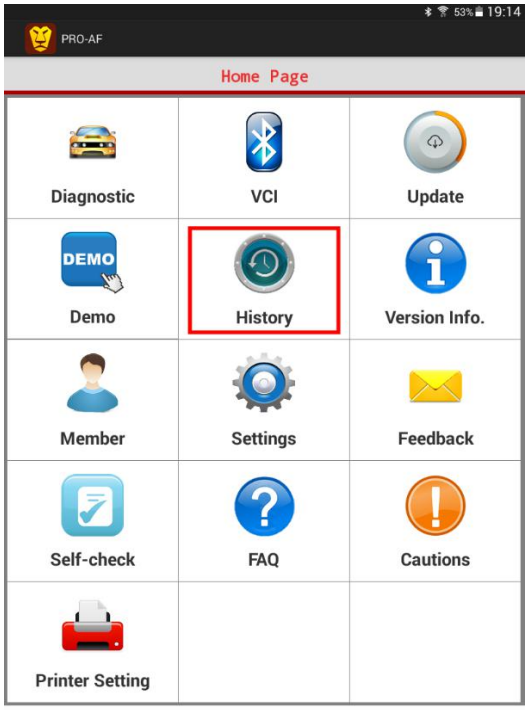

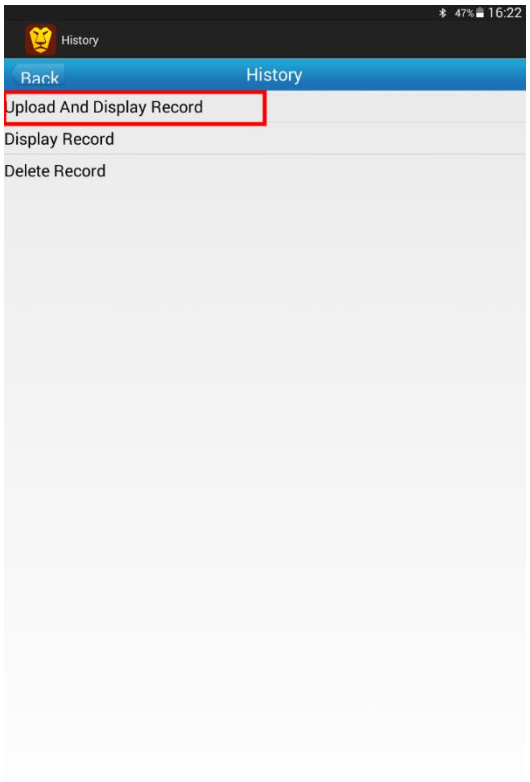

Note: Network must be connected during data uploading.

After service&Tech support

The product is offering 1 year warranty, detailed after-sales service support, please refer to our service policy on our website www.leoscan.com. Please send us an email to service@leoscan.com either to contact our local dealer if you need any support or have any questions.

Thank you for using our product!